


## Clamp-In Valves

(For 0.625" Valve Hole)



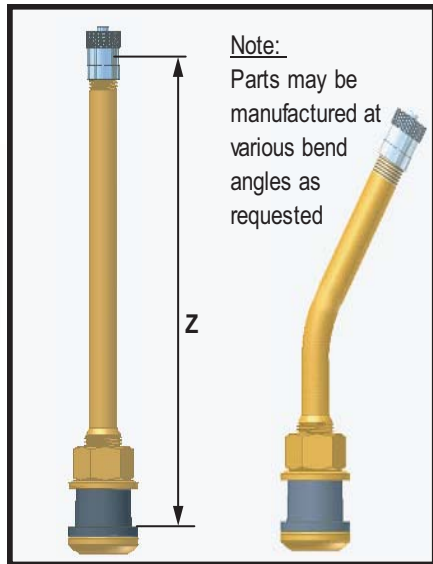

## Truck Valves


| Dill #     | TR # | Effective Length Z |
|------------|------|--------------------|
| VS-570R    | 570  | 3.13"              |
| VS-570-WZA | 570  | 3.13"              |
| VS-571R    | 571  | 3.38"              |
| VS-571-WZA | 571  | 3.38"              |
| VS-572R    | 572  | 3.75"              |
| VS-572-WZA | 572  | 3.75"              |
| VS-573R    | 573  | 4.38"              |
| VS-573-WZA | 573  | 4.38"              |
| VS-574R    | 573  | 4.38"              |
| VS-574WZA  | 573  | 4.38"              |
| TR-575     | 575  | 1.13"              |
| VS-903R    | 575  | 1.13"              |
| VS-1223R   | -    | 1.00"              |
| VS-1223-WZ | -    | 1.00"              |


## High Performance Valves for Specialty Wheels


(Pressure Rated To 200 PSI)


| VS-944DW   |  |
|--|---|
| <ul style="list-style-type: none"> <li>*Dill ACP</li> <li>*Nickel low profile valve</li> <li>*Sealing valve cap</li> <li>*0.453</li> <li>*0.750" effective length</li> </ul> |   |

| VS-944R  |  |
|--|---|
| <ul style="list-style-type: none"> <li>*Dill USA</li> <li>*Chrome low profile valve</li> <li>*Sealing valve cap</li> <li>*0.453" valve hole</li> <li>*0.750" effective length</li> </ul> |   |

| VS-945  |  |
|---|---|
| <ul style="list-style-type: none"> <li>* Chrome low profile valve</li> <li>* Sealing valve cap</li> <li>* 0.625" valve hole</li> <li>* 0.750" effective length</li> </ul> |   |

| VS-911   |  |
|--|---|
| <ul style="list-style-type: none"> <li>*Design to fit unusual valve hole location of late model Toronado and Eldorado</li> <li>*0.453" valve hole</li> </ul> |   |

| TR-416   |  |
|--|---|
| <ul style="list-style-type: none"> <li>*Dill ACP</li> <li>*Nickel profile valve</li> <li>*Sealing valve cap</li> <li>*1.44" effective length</li> <li>*2 Grommets for 0.453" &amp; 0.625" valve holes</li> </ul> |   |


| VS-902CR   |  |
|--|---|
| <ul style="list-style-type: none"> <li>*Dill USA</li> <li>*Nickel low profile valve</li> <li>*Sealing valve cap</li> <li>*1.44" effective length</li> <li>*2 Grommets for 0.453" &amp; 0.625" valve holes</li> </ul> |   |

## VS-550 Series: Used on some new Alcoa wheel applications



Parts designed with screwdriver slot for easy installation.


Recommended installation torque 45in-lbs

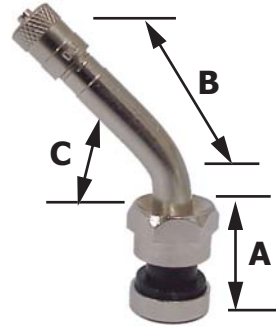



**VS-553-C**


| Dill #   | TR #  | "A"  | "B"  | "C" | Pack Qty |
|----------|-------|------|------|-----|----------|
| VS-552   | 552   | 1.26 | -    | -   | 10       |
| VS-553   | 553   | 2.31 | -    | -   | 10       |
| VS-553-C | 553-C | 0.93 | 1.38 | 45° | 10       |
| VS-553-E | 553-E | 0.98 | 1.38 | 75° | 10       |
| VS-554-D | 554-D | 0.98 | 1.94 | 60° | 10       |
| VS-555-D | 555-D | 0.98 | 2.6  | 60° | 10       |
| VS-555-E | 555-E | 0.98 | 2.6  | 75° | 10       |

## High Performance Valves for Specialty Wheels (Pressure Rated to 200psi)

| VS-902-W   |  |
|--|---|
| <ul style="list-style-type: none"> <li>*Chrome low profile valve</li> <li>*Sealing valve cap</li> <li>*0.453" valve hole</li> <li>*1.44" effective length</li> </ul> |   |

| VS-902-WP   |  |
|---|---|
| <ul style="list-style-type: none"> <li>*Sealing plated extension</li> <li>*0.453 valve hole</li> <li>*1.94" effective length</li> <li>*6541-N sealing valve</li> <li>*Sealing chrome valve cap</li> </ul> |   |

| VS-962C   |  |
|---|---|
| <ul style="list-style-type: none"> <li>*Ford F-Series Trucks with inner dual wheels</li> <li>*Sealing metal cap</li> <li>*0.453 valve hole</li> </ul> |   |

| VS-902K   |  |
|---|---|
| <ul style="list-style-type: none"> <li>*Ford F-Series Trucks with outer steel wheels</li> <li>*Sealing metal extension</li> <li>*0.453 valve hole</li> <li>*1.94" effective length</li> </ul> |   |